Adapt-A-Gap Knife Guards

FITTING INSTRUCTIONS FOR MOST HEADER FRONTS

Thank you for purchasing our Primary Sales Adapt-A-Gap Knife Guards.
Please read everything before beginning

Before starting make sure the front is “SAFE” to work on.
E.g. safety stand on feeder is locked down.

- Remove the existing guards, placing the hold-downs on the platform aligned with their original location.
- Remove the drive-end cover and referring to the Manufacturer's instructions, carefully pull the knife out.
- Remove all guards. Note: when replacing guards which have no wear strip (or replacing individual guards of all models), there is no need to remove the knife. If necessary, the wear strip retaining screws can be removed to facilitate changeover.
- Starting from the Left Hand Side Drive-End, (as viewed from the drivers seat) fit the Primary Sales Knife Guards, as per drawing provided for your kit. Example below.

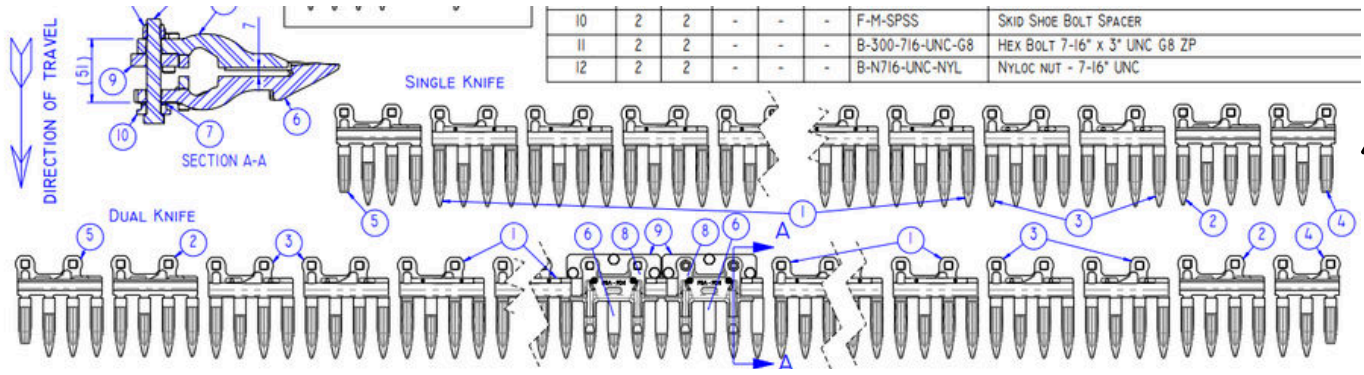

- Fit the rest of the guards consecutively across the front (without tightening), replacing the hold down clips in their original positions.
- Tension the knife guard bolts to speciation with the wear strips located parallel to, and against the knife mounting bar,
- Replace the knife, following Manufacturer's instructions.
- Check alignment by manually winding the knife over as you go.
- Call your supplying Dealer if you require assistance, or contact the team at your nearest Primary Sales office.

Ph: (08) 9250 3500
Email: sales@primarysales.com.au
Web: primarysales.com.au